


CASE FINISH	CURRENT (AMPS)	WORKING VOLTAGE			MAXIMUM DC RESISTANCE (OHMS)	MAXIMUM VOLTAGE DROP	MINIMUM CAPACITANCE (uF)	MIN. INSERTION LOSS PER MIL.-STD-220, FULL LOAD, +25°C												
		-55°C TO +85°C	-55°C TO +125°C	DC				AC	DC	14 KHz	30 KHz	50 KHz	75 KHz	100 KHz	150 KHz	300 KHz	500 KHz	1 MHz	10 MHz	100 MHz
		AC	DC	AC	0.005	DC	1.4	--	15	--	--	--	25	34	--	44	60	70	70	--

**PART MARKING:**

9010-100-0049  
SCI DATECODE

**PACKAGE MARKING:**  
STANDARD

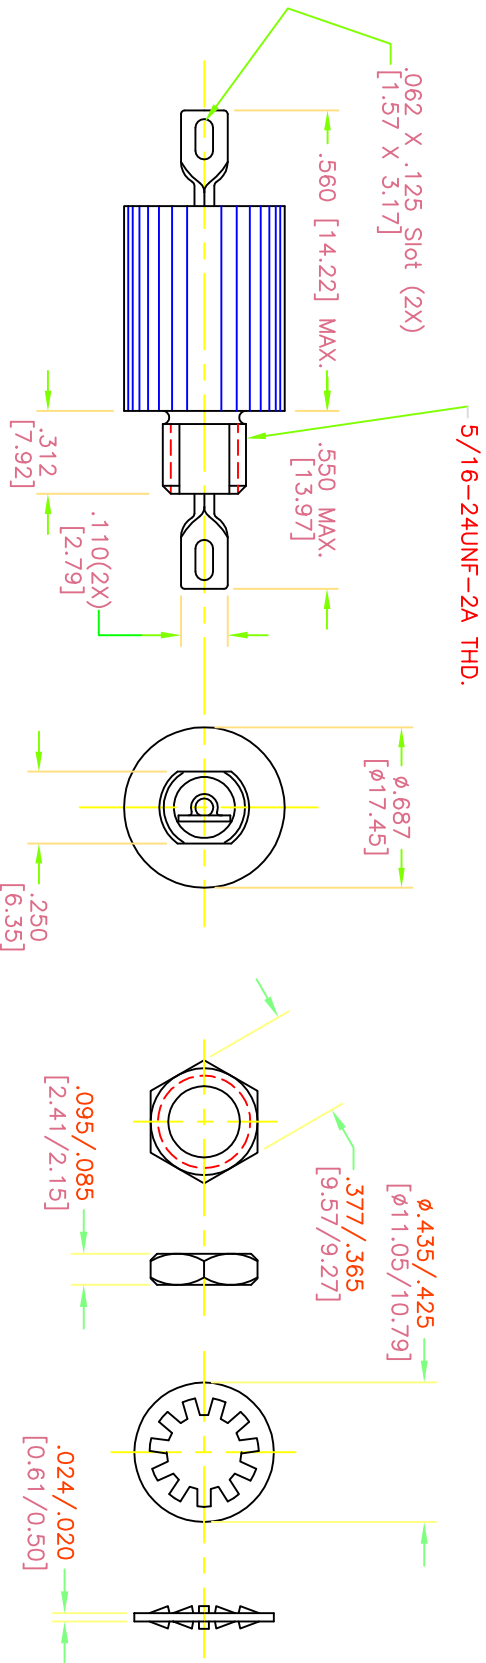

**SCHEMATIC**



**MTG. HARDWARE**

**NOTES:**

1) MOUNTING TORQUE NOT TO EXCEED 7in-lbs.

**MARKING NOTES:**  
N/A

REV. NO.	DESCRIPTION	DATE	BY	CHKD.	APP'D.	QTY.	LOC.	REV. NO.	DESCRIPTION	DATE	BY	CHKD.	APP'D.	QTY.	LOC.
02	CHANGE NOTICE														

Quality Products From The Specialists In Electro-Magnetic Compatibility

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. [MILLIMETERS]

DD NOT SCALE.

TOLERANCES UNLESS OTHERWISE SPECIFIED

Dec. .xxx±	.010
Angles ±0° 30'	

CODE IDENT. NO. DLSP2

Sheet 1 of 1

SPECTRUM CONTROL, INC.

ERIE, FAIRVIEW PENNSYLVANIA

Description Low Pass EMI Filter

9010-100-0049